


METRİK DIŞ MAKİNA KLAVUZU

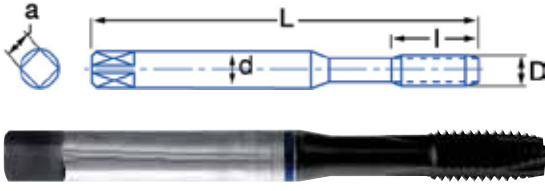

PMX
+
TIALN

DIN
371

B
3,5-5h

GUN



Tol.
6H


α
10-12°



A.R.I.*
I.H.P.*

*Alto Rendimiento Intensivo
*Intensive High Performance

RT.
103125

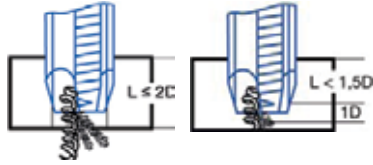


| Metal | Vc* |
|----------|-------|
| Alt Grup | TIALN |
| 1 | 1.2 |
| 2 | 2.1 |
| 5 | 5.1 |
| | 5.2 |

* Posible Uso en Seco: Vc -50 % / Possible Dry-Use: Vc -50%

Vc= m/min.


Kullanım yeri

- Çelik
- Paslanmaz
- Sarı
- Bronz
- Bakır



| D mm | P | L mm | l mm | d mm | α | Z | TIALN € |
|------|------|------|------|-------|----------|---|---------|
| M 3 | 0,50 | 56 | 11 | 3,50 | 2,70 | 3 | |
| M 4 | 0,70 | 63 | 13 | 4,50 | 3,40 | 3 | |
| M 5 | 0,80 | 70 | 16 | 6,00 | 4,90 | 3 | |
| M 6 | 1,00 | 80 | 17 | 6,00 | 4,90 | 3 | |
| M 8 | 1,25 | 90 | 20 | 8,00 | 6,20 | 3 | |
| M 10 | 1,50 | 100 | 24 | 10,00 | 8,00 | 3 | |

METRİK DIŞ MAKİNA KLAVUZU

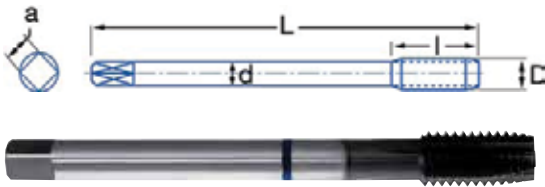

PMX
+
TIALN

DIN
376

B
3,5-5h

GUN



Tol.
6H


α
10-12°



A.R.I.*
I.H.P.*

*Alto Rendimiento Intensivo
*Intensive High Performance

RT.
103225

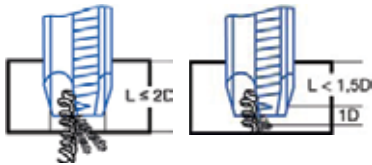

| Metal | Vc* |
|----------|-------|
| Alt Grup | TIALN |
| 1 | 1.2 |
| 2 | 2.1 |
| 5 | 5.1 |
| | 5.2 |

* Posible Uso en Seco: Vc -50 % / Possible Dry-Use: Vc -50%

Vc= m/min.

Kullanım yeri

- Çelik
- Paslanmaz
- Sarı
- Bronz
- Bakır

| D mm | P | L mm | l mm | d mm | α | Z | TIALN € |
|------|------|------|------|------|----------|---|---------|
| M 12 | 1,75 | 110 | 24 | 9 | 7,00 | 3 | |